


LUXOMAT® PD4-M-DUO-DALI/DSI-FC



Optimal for 2 light zones



FC

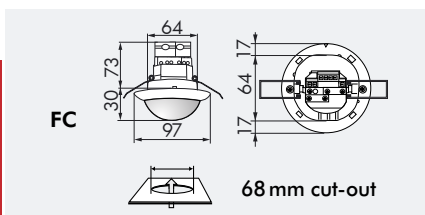

FC

NEW!


■ TECHNICAL DATA

- 230V~ ±10%
- 360°
- seated Ø 6.40 m
- across Ø 24.00 m
- towards Ø 8.00 m
- IP20 / Class II / CE
- FC** Ø97 x H 103 mm
- 25°C to +50°C
- Housing UV- and shock-resistant Polycarbonate
- IR-PD-DALI
- Channel 1 and Channel 2 (light control)**
- DALI-Master each channel max. 12 EB's
- 1 min. - 30 min.
- 10 - 2000 Lux

i PRODUCT INFORMATION

- Remote controllable group occupancy detector **LUXOMAT® PD4-M-DUO-DALI** as Master version for false ceiling mounting with 2 DALI interfaces and with circular detection area
- For 2 separate light groups
- Two integrated light sensors for automatic **constant light control**
- Control of up to 12 digital dimming electronic ballasts and control modules as a group per DALI output
- Many programmes adjustable with the remote control **LUXOMAT® IR-PD-DALI**
- Switch-over between DSI and DALI via remote control
- **Typical applications:** offices, conference rooms, schools, nursery schools, hospitals etc.

▶ Beside the default for the light value at the workstation and the default of the duty cycle the remote control will dim in the whole span, which the electronic ballast admits.

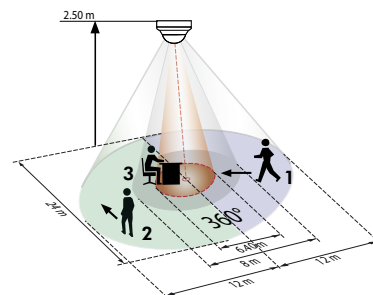

- 1 Walking towards
- 2 Walking across
- 3 Seated activity

■ ACCESSORY (OPTIONAL)

IR-PD-DALI


Wire basket

Blinds

Slaves



(to order separately)



PD4-S

Description	Colour	Part number
PD4-M-DUO-DALI/DSI-FC	white	92276
Accessory (optional)		
LUXOMAT® IR-PD-DALI	grey	92094
Wire basket BSK	white	92199