

LUXOMAT® Indoor 180-S



TECHNICAL DATA




- 230V~ ±10%
- 180°
- max. 10.00 m
- IP20 / Class II / CE
- L87 x W87 x D61 mm
- 25°C to +50°C
- UV- and shock-resistant Polycarbonate

Slave output

- 230 V

PRODUCT INFORMATION

- LUXOMAT® Indoor 180-S-FM, Slave, automatic wall switch with 180° detection area for Master/Slave combination
- This slave was specially developed for parallel operation with LUXOMAT® Indoor 180-M-2C
- Combinable with coverings in five different colours
- For the combination with switches of leading manufacturers the enclosed additional intermediate frame can be used
- Version IP20 and IP54 (only European version – for moisture-proofs, garages, cellar steps)
- Significant reduction in day-to-day energy costs with this Master/Slave combination, e.g. when used in corridors or rooms used by the public
- Motion can be detected in all room segments using slave
- When a movement is detected, the slave transmits an impulse to the master
- The movement is detected independently of light level
- There are no more adjustment elements available
- **Application examples:** monitoring of public lavatories, corridors, archive rooms, conference rooms etc.
- **Coverings please order separately!**

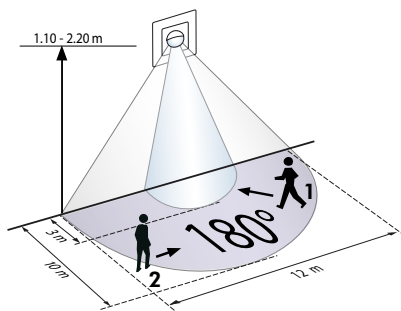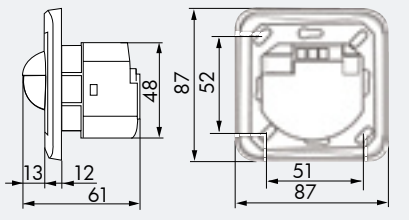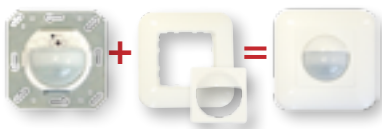

- 1 ■ Walking towards
- 2 ■ Walking across

ACCESSORY (OPTIONAL)

Covering IP20



pure white, RAL9010



traffic white, RAL9016



cream white, RAL1013



anthracite, RAL7021



silver, RAL9006

Covering IP54



pure white, RAL9010

SM-Socket



pure white, RAL9010

Blinds



Description	Colour	Part number
Indoor 180-S, fully fitted	pure white, RAL9010	92135
Sensor insert for Indoor 180-S-FM	–	92660
Accessory for sensor insert		
Covering IP20	pure white, RAL9010	92630
Covering IP20	traffic white, RAL9016	92631
Covering IP20	cream white, RAL1013	92632
Covering IP20	silver, RAL9006	92633
Covering IP20	anthracite, RAL7021	92634
Covering IP54	pure white, RAL9010	92139
Accessory (optional)		
SM-Socket for Indoor	pure white, RAL9010	92141